

TLB-F




Flail Mower For Smaller Skid Steer Loader

The TLB-F shredder is perfect for mowing and shredding grass and brush up to around 1" in diameter. Flail mowers are preferred over rotary cutters as they don't propel material everywhere.

The TLB-F models are designed for smaller to medium sized skid steer loaders which have sufficient auxiliary oil flow (see chart below for required oil flow per minute).



Optional hydraulic hoses are available from Needham Ag

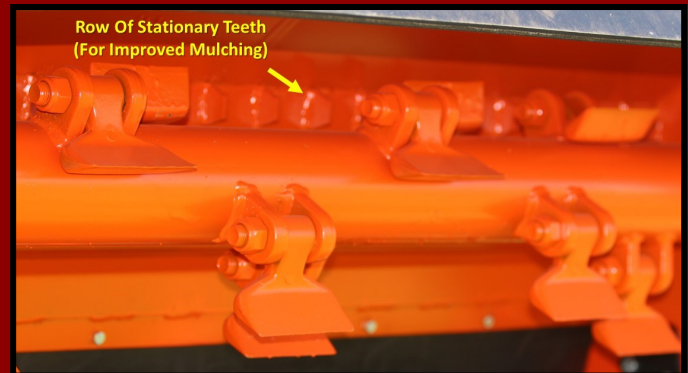


Row Of Stationary Teeth (For Improved Mulching)

Model	Overall Width (inches)	Cutting Width (inches)	Weight (lb)	Rotor Speed (RPM)	Required Oil Flow (gal/min)	Ideal Oil Pressure (PSI)	# Of Flails	# Of Drive Belts	Price \$
TLB-F 120	53	49	620	2000	11-16	2900-3500	12	3	5390
TLB-F 130	57	53	661	2000	11-16	2900-3500	13	3	5590
TLB-F 140	61	57	685	2000	14-18	2900-3500	14	3	5790
TLB-F 150	65	61	705	2000	14-18	2800-3500	15	3	6290
TLB-F 160	69	65	750	2000	16-20	2900-3500	16	3	6590

Standard Equipment

- Skid Steer Hookup Plate
- Electronically Balanced, Heavy Duty Rotor With Flails
- Heavy Duty, Adjustable Steel Roller With Scrapers
- Lateral Skids
- Rubber Flaps And Chains To Help Control Flying Debris.
- Mulching Teeth On Inside Of Housing
- High Quality Paint



Options

Oscillating Saddle

The oscillating saddle is highly recommended if you plan to mow a lot of grass on undulating surfaces, because it allows the flail mower to follow the ground contours MUCH better. It weighs 200 lb.

1150

Flow Regulator

The flow regulator is recommended for skid steer loaders with more auxiliary flow than the mower is designed for (and for machines which don't have the ability to regulate auxiliary flow from the cab). The flow regulator helps set the rotor speed to 2000 rpm and to optimize its operation.

550

