



LIPA TLB-F


Flail Mower For Smaller Skid Steer Loader

The TLB-F flail mower is perfect for mowing and mulching grass, brush and small trees up to around 2" in diameter (but larger materials can be processed with slow and careful operation). The TLB-F flail mowers are considered a safer option than rotary cutters as they don't throw material everywhere. The TLB-F models are designed for around 4000 to 8000 lb skid steer loaders which have sufficient auxiliary oil flow (see chart below for required oil flow per minute).



No Case Drain
Required

Optional hydraulic hoses are available from Needham Ag

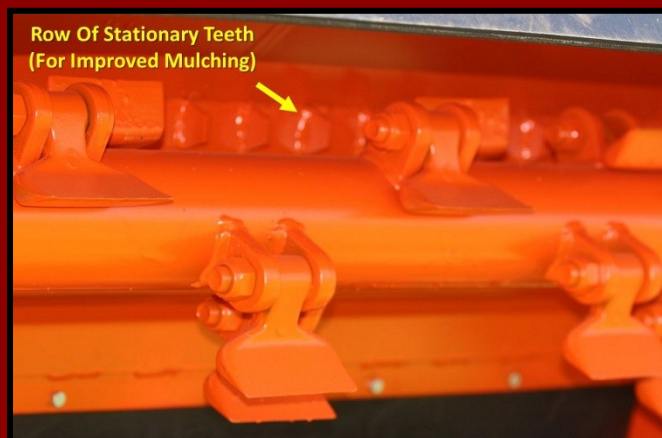

Row Of Stationary Teeth
(For Improved Mulching)

Model	Overall Width (inches)	Cutting Width (inches)	Weight (lb)	Rotor Speed (RPM)	Required Oil Flow (gal/min)	Ideal Oil Pressure (PSI)	# Of Flails	# Of Drive Belts	Price \$
TLB-F 140	61	57	685	2300	16-20	2800-3500	14	3	5990
TLB-F 160	69	65	750	2300	18-22	2900-3500	16	3	6590


Standard Equipment

- Standard Skid Steer Adapter Plate.
- Electronically Balanced, Heavy Duty Rotor With Flails.
- Heavy Duty, Adjustable Rear Steel Roller, With Scraper To Keep Roller Clean When Mowing In Damp Conditions.
- Lateral Skids (Replaceable).
- Rubber Flaps Front And Rear, Plus Front Chains To Help Control Flying Debris.

Options

Flow Regulator (Shown Below)

The flow regulator is required for skid steer loaders with more auxiliary flow than the mower is designed for (and for machines which don't have the ability to regulate auxiliary flow from the cab). The flow regulator helps set the rotor speed to around 2300 rpm, to optimize its operation.



790

For more information or to order, call (270) 785 0999, or visit our online store at needhamag.com