




Please click the QR code to the left to see a YouTube Video of the Lipa TLB-F flail mower!

TLB-F Flail Mower For Smaller Skid Steer Loader

The TLB-F shredder is perfect for mowing and mulching grass, brush and small trees up to around 2" in diameter (but larger materials can be processed with slow and careful operation). Flail mowers are considered a safer option than rotary cutters as they don't throw material everywhere. The TLB-F models are designed for around 4000 to 8000 lb skid steer loaders which have sufficient auxiliary oil flow (see chart below for required oil flow per minute).



No Case Drain Required

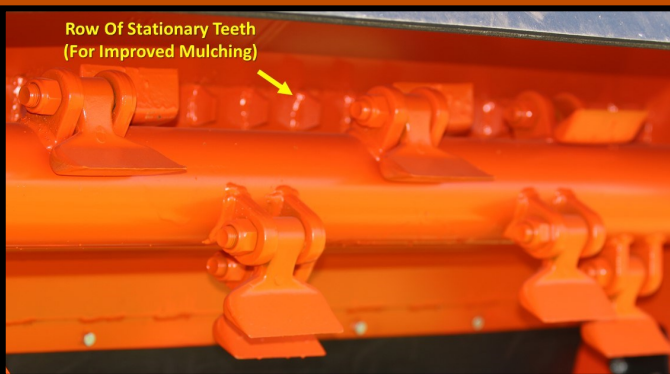

Optional hydraulic hoses are available from Needham Ag

Model	Overall Width (inches)	Cutting Width (inches)	Weight (lb)	Rotor Speed (RPM)	Required Oil Flow (gal/min)	Ideal Oil Pressure (PSI)	# Of Flails	# Of Drive Belts	Price \$
TLB-F 140	61	57	685	2300	16-20	2900-3500	14	3	5990
TLB-F 150	65	61	705	2300	16-20	2800-3500	15	3	6590
TLB-F 160	69	65	750	2300	18-22	2900-3500	16	3	6990


Standard Equipment

- Skid Steer Hookup Plate
- Electronically Balanced, Heavy Duty Rotor With Flails.
- Heavy Duty, Adjustable Rear Steel Roller, With Scraper To Keep Roller Clean When Mowing In Damp Conditions.
- Lateral Skids (Replaceable).
- Rubber Flaps Front And Rear, Plus Front Chains To Help Control Flying Debris.
- Stationary Knives For Improved Mulching.
- High Quality Paint

Options

Flow Regulator (Shown Below)

The flow regulator is required for skid steer loaders with more auxiliary flow than the mower is designed for (and for machines which don't have the ability to regulate auxiliary flow from the cab). The flow regulator helps set the rotor speed to 2300 rpm, to optimize its operation.



790