

TLBE-S




Please click the QR code to the left to see a YouTube Video of the Lipa TLBE-S mowers in action!

Heavy Duty Flail Mower For 12,000 - 20,000 lb Mini Excavators



Optional hydraulic hoses are available from Needham Ag

The TLBE-S heavy duty flail mower is perfect for mowing and shredding grass, brush and small trees up to around 3" in diameter in areas too steep or too unsafe to mow with tractors or skid-steer loaders. The TLBE-S range is designed for larger mini excavators which weigh between around 12,000 and 20,000 lb and those which have sufficient oil flow (see auxiliary oil flow requirements below).

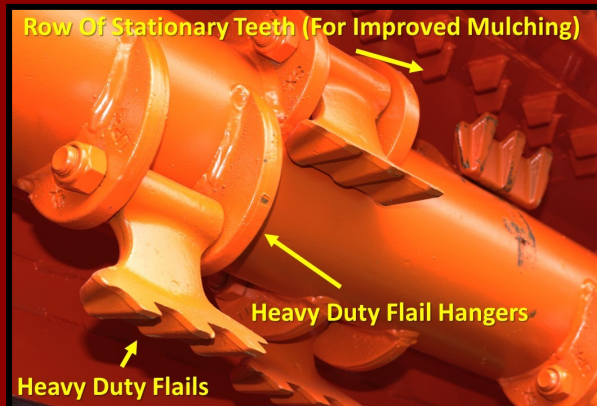


Model	Overall Width (inches)	Cutting Width (inches)	Weight (lb) *	Rotor Speed (RPM)	Required Oil Flow (gal/min)	Ideal Oil Pressure (PSI)	Number Of Flails	Number Of Drive Belts	Price \$
TLBE-S 90	41	37	680	2000	16-20	3000-3500	6	3	5750
TLBE-S 100	45	41	790	2000	16-20	3000-3500	7	3	6050
TLBE-S 120	53	49	940	2000	18-24	3000-3500	8	3	6550

* Approximate weight, with typical mounting bracket and hydraulic hoses.

Standard Equipment

- Excavator hookup for most excavators (please contact us to confirm availability). Pins are not included.
- Heavy Duty Group 3 Hydraulic Motor.
- Electronically Balanced, Heavy Duty Rotor With Toothed Steel Flails/Hammers For Chopping Larger Material Up To 3".
- Heavy Duty, Adjustable Rear Steel Roller With Mud Scraper.
- Heavy Duty Lateral Skids.
- Chains Across The Front And Rubber Flaps Front and Back To Help Control Flying Debris.
- Mulching Teeth On The Inside Of Flail Mower Housing. To Help With Shredding Of Material (see video).

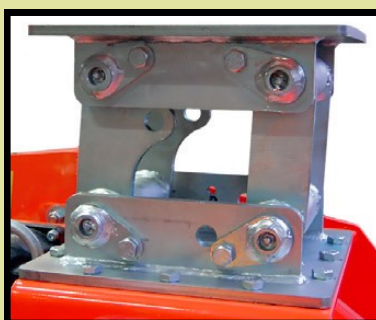

Options

TLBE-S Oscillating Saddle

The oscillating saddle is a heavy duty parallel linkage that allows the mower to follow the ground better. Its purchased by around 75% of customers and its strongly recommended if you plan to mow a lot of undulating ground. It adds 120 lb to the weight of the mower, so its only recommended for mini excavators with plenty of available lifting capacity.

910



TLBE-S Flow Regulator

The flow regulator is required for mini excavators which have higher auxiliary flow than what the mower is designed for (and they don't have the ability to reduce the auxiliary flow on the excavator). The flow regulator allows precise auxiliary flow adjustment, to set the rotor speed to around 2000 rpm, to optimize its operation.

590